



NELMOR-GRANULATE

AS SERIES SCREENLESS GRANULATOR



AS SERIES STANDARD FEATURES

- Screenless operation produces clean, no longs regrind
- Smallest footprint squeezes into the tightest of spaces
- Quick and easy, no tools access - just open the doors
- Vacuum bin with 1" or 2" diameter take-offs available
- Solid dowel and bolted construction
- Locking swivel casters mounted on base
- TEFC 230/3/60 or 460/3/60 gear motor
- 115/1/60 control voltage wired with electrical/mechanical safety interlock

OPTIONAL FEATURES

- Compressed air evacuation system
- High level indicator



1100 E Woodfield Road
Schaumburg, IL 60173 USA
Tel. 847-273-7700 Fax 847-273-7804

www..com



**WHITLOCK/
MATERIAL
HANDLING**



HEAT & COOL



**BLEND &
RECLAIM**



**NELMOR/
GRANULATE**



**DOWNSTREAM
EXTRUSION**



AUTOMATE



**SYSTEMS
CONTRACTING**




SERVICE




NELMOR-GRANULATE

AS SERIES SCREENLESS GRANULATOR

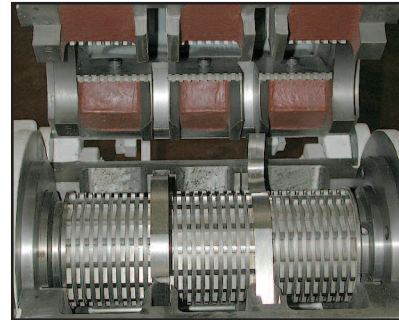

Clamshell opening for easy cleaning

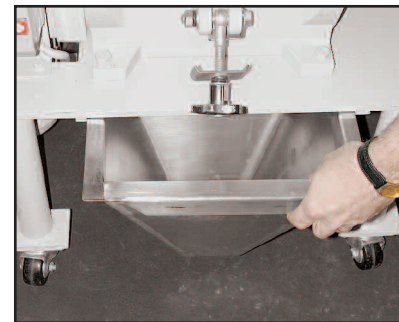

Slide out discharge



"Tool free" opening for quick access during cleaning

Model	AS1010	AS1213	AS1616
Chamber Size (in.)	10 x 10.5"	11.5 x 13.5"	16" x 16"
Cutter Size, mm (in.)	5mm (.18")		
Feed Height, inches	52"	60"	63"
Throughput, lbs./hr	30 lbs./hr	40 lbs./hr	50 lbs./hr
Working Envelope (LXW)	29"x18"	32.5"x23"	23"x49"
Weight (lbs.)	396 lbs	606 lbs	992 lbs



1100 E Woodfield Road
Schaumburg, IL 60173 USA
Tel. 847-273-7700 Fax 847-273-7804

www.aecinternet.com



**WHITLOCK/
MATERIAL
HANDLING**



HEAT & COOL



**BLEND &
RECLAIM**



**NELMOR/
GRANULATE**



**DOWNSTREAM
EXTRUSION**



AUTOMATE



**SYSTEMS
CONTRACTING**



SERVICE